

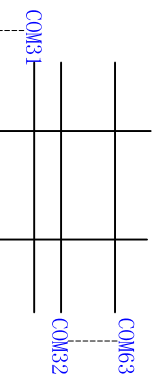
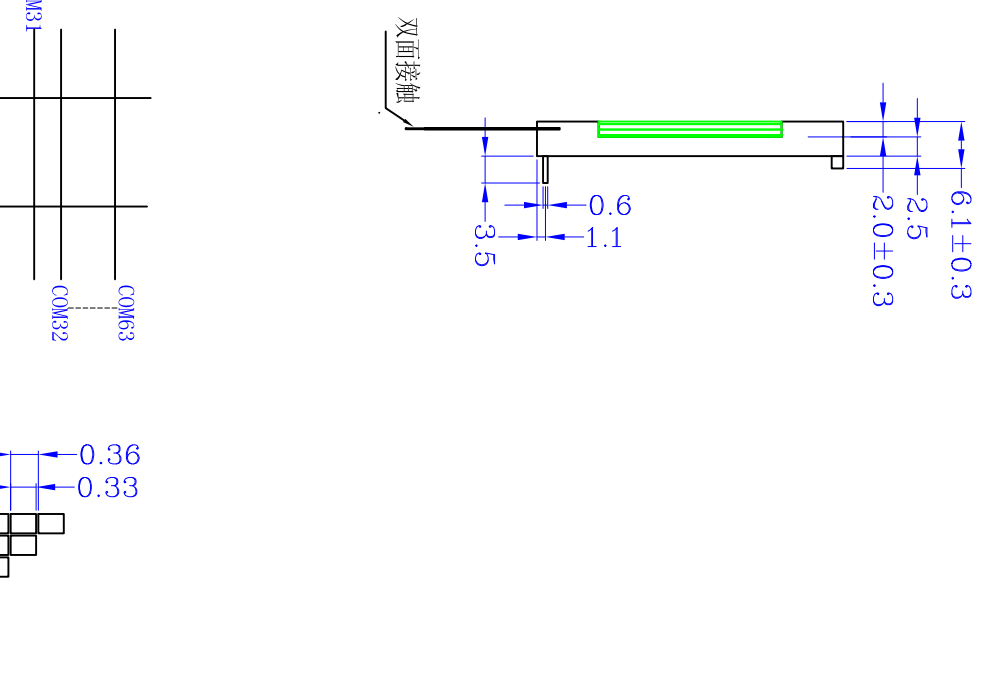


28	/CS
27	/RST
26	A0
25	R/W
24	E
23	DB0
22	DB1
21	DB2
20	DB3
19	DB4
18	DB5
17	DB6(sct)
16	DB7(sct)
15	VSS
14	VOUT
13	C3P
12	C1N
11	C1P
10	C2P
9	C2N
8	V4
7	V3
6	V2
5	V1
4	V0
3	VSS
2	P/S
1	VDD

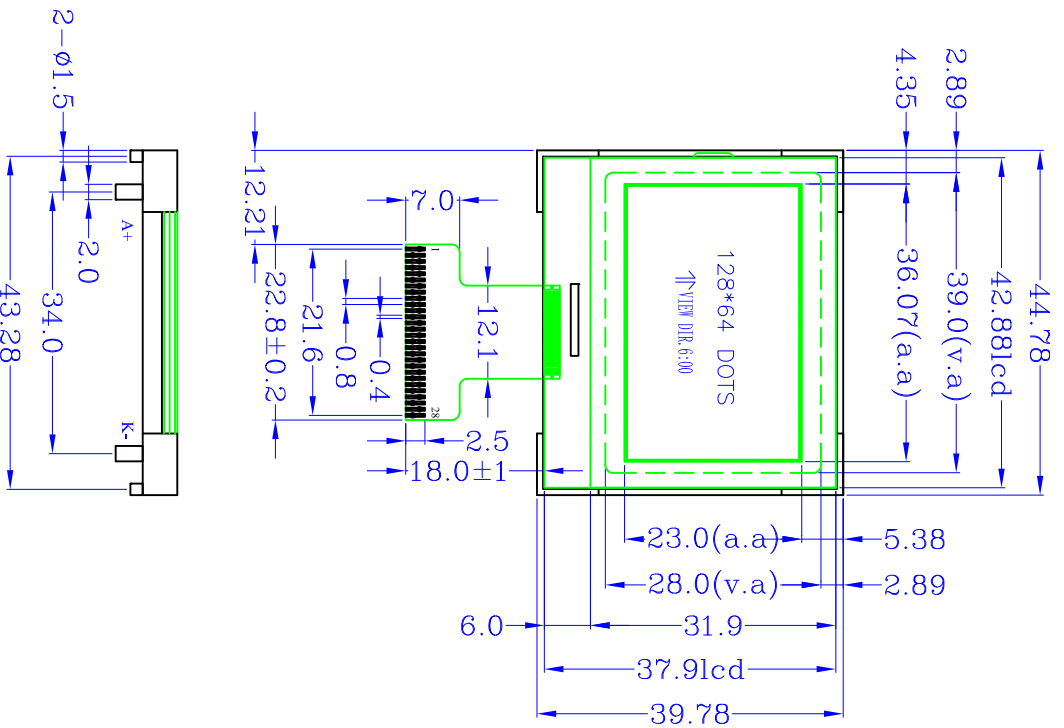

- NOTES:
1. DISPLAY TYPE: STN,YELLOW-GREEN
 2. POLARIZER TYPE: TRANSPARENT, POSITIVE
 3. VIEW DIRECTION: 6:00
 4. OPERATING TEMPERATURE: -10°C~+60°C
 5. STORAGE TEMPERATURE: -20°C~+70°C
 6. VDD: +3.3V
 7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
 8. CONTROLLER: ST7565P
 9. BACKLIGHT TYPE: WHITE
 10. BACKLIGHT SUPPLY VOLTAGE: +3.0V

WAYNG WAYING (HONGKONG) SHARES LIMITED

DESIGN: MODEL NUMBER: UNITS: MM

CHECK: WYM12864K11G VERSION: A

APPROVE: SHEET: 1 OF 1

Unspecified tolerances are ±0.3 DATE: 2012-03-20