
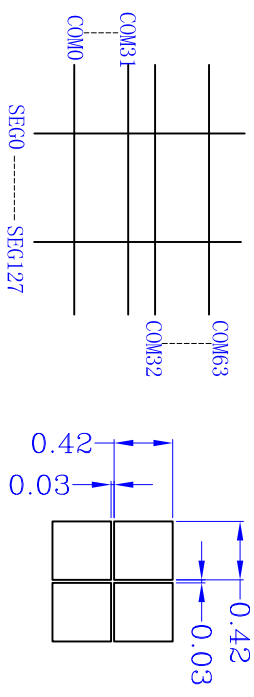
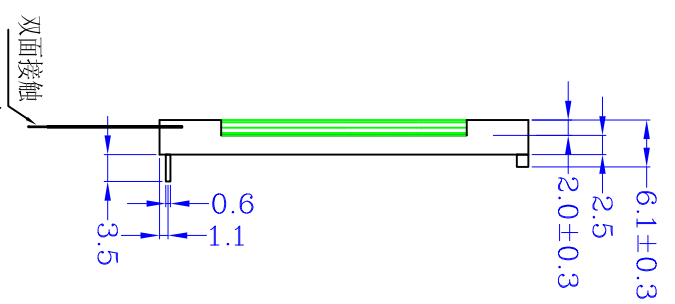
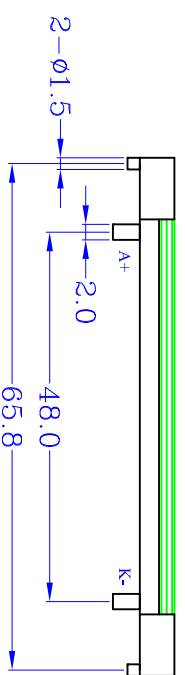


1	/CS
2	/RST
3	A0
4	R/W
5	E
6	DB0
7	DB1
8	DB2
9	DB3
10	DB4
11	DB5
12	DB6(sct)
13	DB7(sct)
14	VDD
15	VSS
16	VOUT
17	C4P
18	C3P
19	C1N
20	C1P
21	C2P
22	C2N
23	V1
24	V2
25	V3
26	V4
27	V0
28	P/S

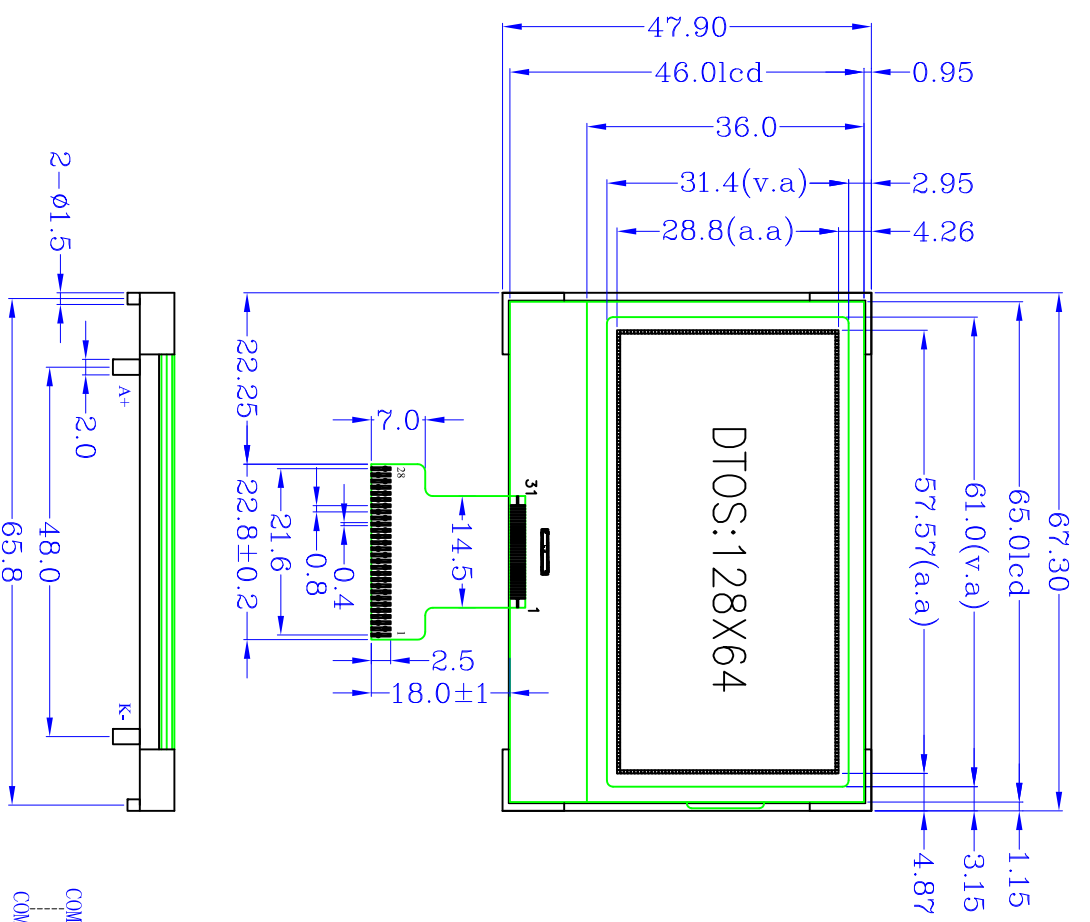

- NOTES:
1. DISPLAY TYPE: FSTN
  2. POLARIZER TYPE: TRANSPARENT, POSITIVE
  3. VIEW DIRECTION: 6:00
  4. OPERATING TEMPERATURE: -20°C~+70°C
  5. STORAGE TEMPERATURE: -30°C~+80°C
  6. VDD: +3.3V
  7. DRIVE METHOD: 1/64DUTY, 1/9BIAS
  8. CONTROLLER: NT7538
  9. BACKLIGHT TYPE: WHITE
  10. BACKLIGHT SUPPLY VOLTAGE: 3.0V

		WAYING (HONGKONG) SHARES LIMITED	
		DESIGN:	MODEL NUMBER:
CHECK:	WYM12864K27G	UNITS:	MM
APPROVE:		VERSION:	A
Unspecified tolerances are ±0.3		SHEET:	1 OF 1
		DATE:	2013-03-27