


| | | |
|----|------|---------------------------------|
| 1 | VSS | Power ground |
| 2 | VDD | Power supply (+3.3V) |
| 3 | VO | Contrast adjust |
| 4 | CS | Chip select (Serial mode) |
| 5 | SID | Serial data input (Serial mode) |
| 6 | SCLK | Serial clock (Serial mode) |
| 7 | /RBS | Reset signal |
| 8 | VOVT | Internal booster voltage output |
| 9 | A | Backlight (+) +3.3V |
| 10 | K | Backlight (-) |

NOTES:

1. DISPLAY TYPE: STN,BLUE
2. POLARIZER TYPE: TRANSMISSIVE,NEGATIVE
3. VIEW DIRECTION: 6:00
4. OPERATING TEMPERATURE: -20°C~+70°C
5. STORAGE TEMPERATURE: -30°C~+80°C
6. VDD: +3.3V
7. DRIVE METHOD: 1/32DUTY,1/5BIAS
8. CONTROLLER: ST7920
9. BACKLIGHT TYPE: WHITE
10. BACKLIGHT SUPPLY VOLTAGE: +3.3V

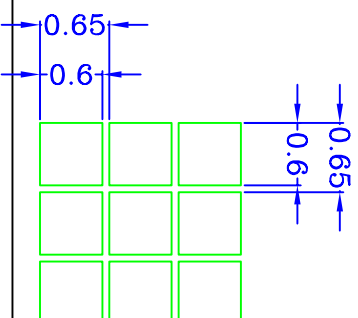

WYING WAYING (HONGKONG) SHARES LIMITED

DESIGN: MODEL NUMBER: WYM16032D UNITS: MM

CHECK: VERSION: A SHEET: 1 OF 1

APPROVE: SHEET: 1 OF 1

Unspecified tolerances are ±0.3 DATE: 2008-09-10